




US 20060101908A1

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2006/0101908 A1**
(43) **Pub. Date: May 18, 2006**(54) **THERMAL MASS FLOW RATE SENSOR INCLUDING BYPASS PASSAGEWAYS AND A SENSOR PASSAGEWAY HAVING SIMILAR ENTRANCE EFFECTS**(52) **U.S. Cl. 73/202.5**(76) **Inventors: Paul Meneghini, Haverhill, MA (US); Ali Shajii, Canton, MA (US)**

Correspondence Address:
Toby H. Kusmer
McDERMOTT, WILL & EMERY
28 State Street
Boston, MA 02109 (US)

(21) **Appl. No.: 10/988,026**(22) **Filed: Nov. 12, 2004****Publication Classification**(51) **Int. Cl. G01F 1/68 (2006.01)**(57) **ABSTRACT**

A sensing apparatus for use in a mass flow rate sensor for measuring a fluid flow rate includes a main conduit for containing a fluid flow, and a sensor passageway for tapping a portion of the fluid flow from the main conduit at a first location, and returning the portion of the fluid flow to the conduit at a second location. At least one bypass passageway, which may be provided in the form of a tube, is positioned in the main conduit between the first and second locations, and the bypass passageway is provided with non-negligible entrance effects that are substantially equal to entrance effects of the sensor passageway, so that a bypass ratio of the apparatus remains constant. A mass flow rate sensor of the present disclosure accurately measures any type of gas but only requires calibration in only one reference gas.

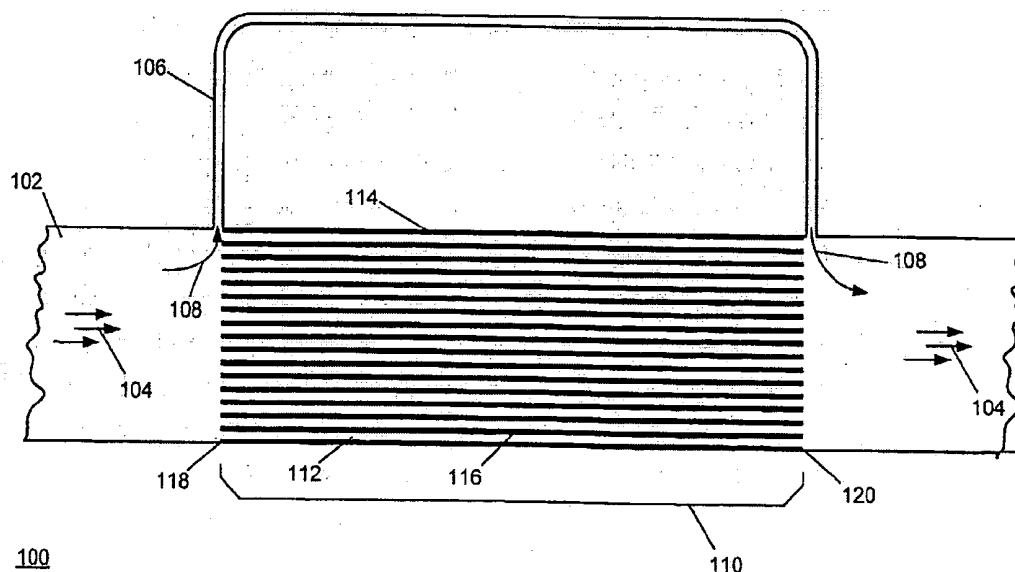100

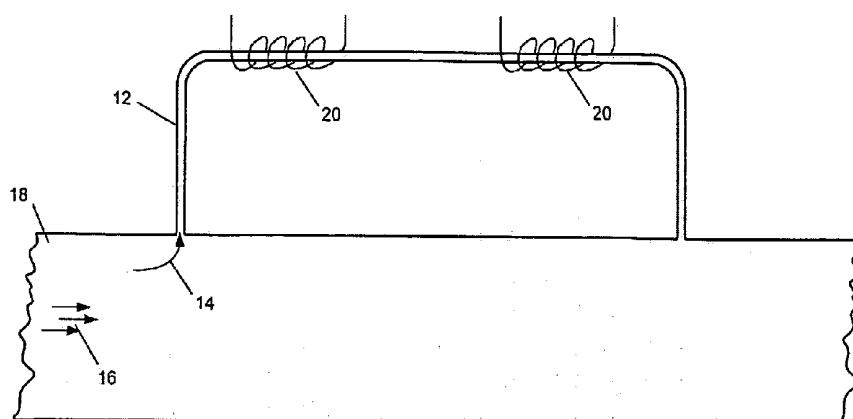


FIG. 1

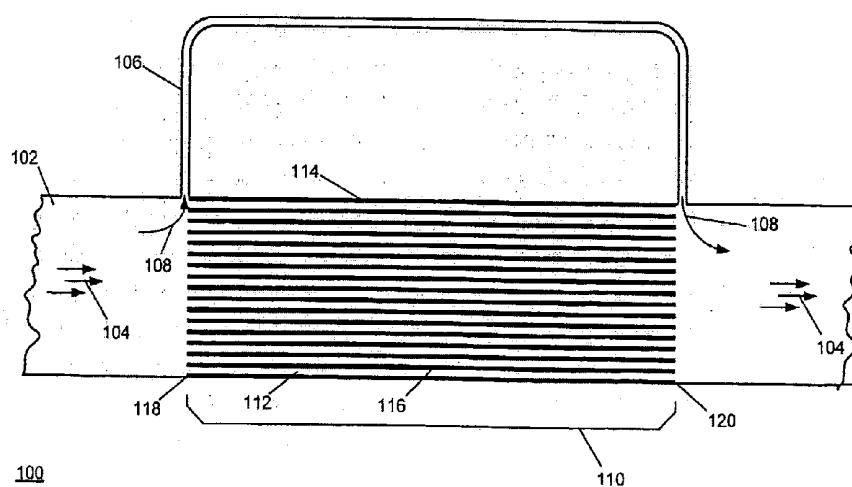


FIG. 2

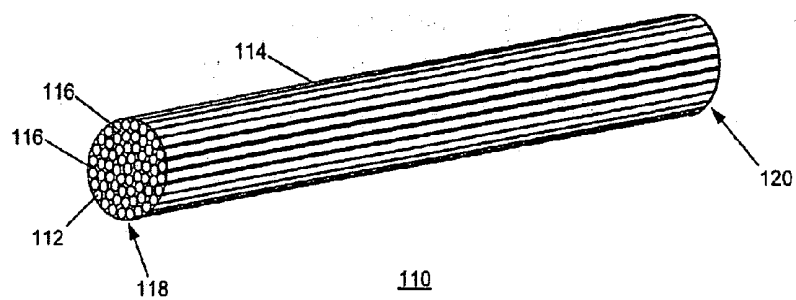


FIG. 3

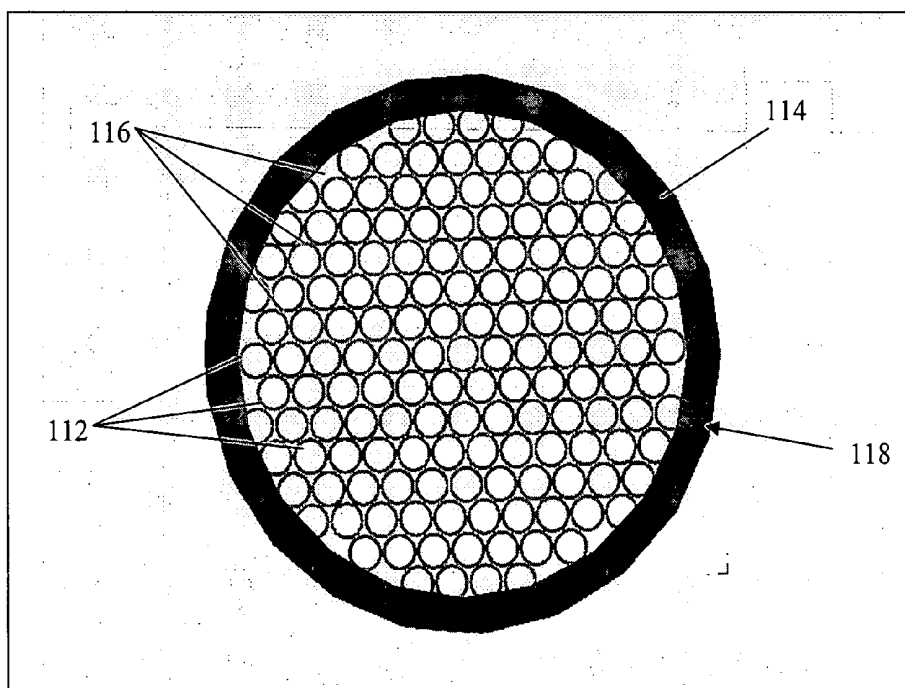


FIG. 4

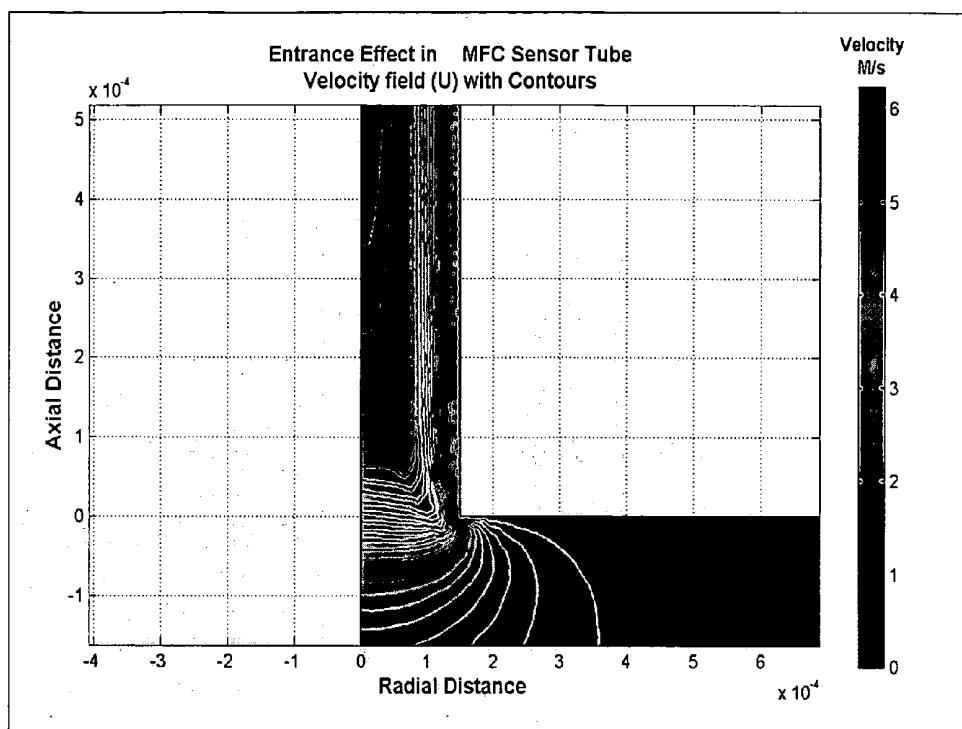


FIG. 5

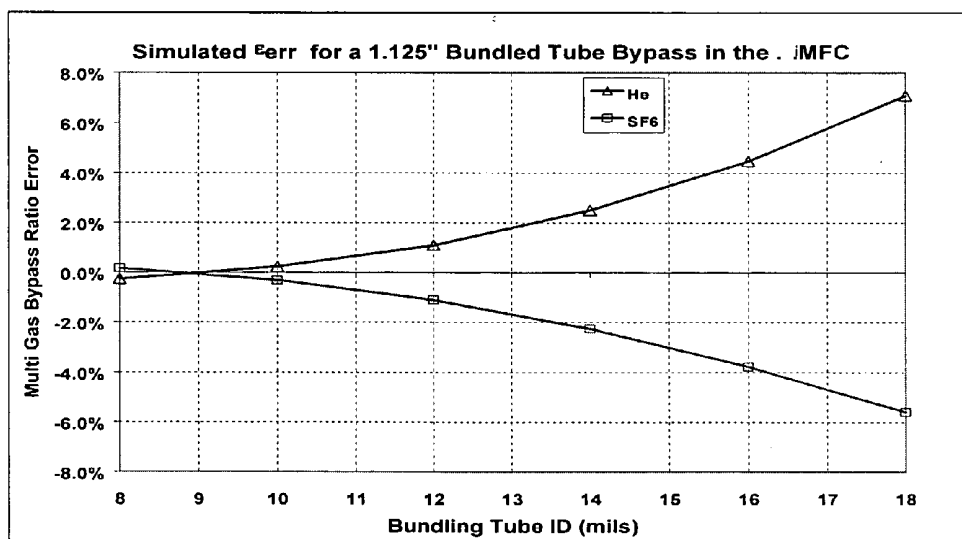


FIG. 6

THERMAL MASS FLOW RATE SENSOR INCLUDING BYPASS PASSAGEWAYS AND A SENSOR PASSAGEWAY HAVING SIMILAR ENTRANCE EFFECTS

FIELD OF THE DISCLOSURE

[0001] The present disclosure relates to mass flow rate sensors, and more particularly, to a thermal based mass flow rate sensor having a sensor passageway and at least one bypass passageway, wherein the bypass passageway has non-negligible entrance effects similar to entrance effects of the sensor passageway so that the mass flow rate sensor accurately measures any type of gas but only requires calibration in one reference gas.

BACKGROUND OF THE DISCLOSURE

[0002] In the semiconductor manufacturing industry, it is necessary to achieve precise control of the quantity, temperature and pressure of one or more reactant materials which are delivered in a gaseous state to a reaction chamber. Mass flow controllers are widely used in the semiconductor manufacturing industry to control the delivery of process reactants. A mass flow controller generally includes a mass flow rate sensor for measuring the rate of flow of gas through the controller, a valve for controlling the flow of gas through the controller and a computer connected to the mass flow rate sensor and the valve. The computer is programmed with a desired flow rate, which the computer compares to an actual flow rate as measured by the mass flow rate sensor. If the actual flow rate does not equal the desired flow rate, the computer is further programmed to open or close the valve until the actual flow rate equals the desired flow rate.

[0003] Thermal mass flow sensors operate on the principle of conservation of thermal energy, where power applied to a flowing gas equals the mass flow rate of the gas multiplied by the specific heat of the gas, the density of the gas and the temperature change of the gas. The mass flow rate can therefore be determined if the properties of the gas, the temperature changes of the gas, and the rate of power applied to the gas are known.

[0004] One class of thermal mass flow rate sensors employs a sensor passageway as the primary sensing mechanism, as shown in the exemplary prior art mass flow rate sensor 10 of FIGS. 1 and 2. In such a device, a sensor passageway 12 diverts a portion 14 of the main flow 16 passing through a primary conduit 18 of the MFC, while the remainder of the flow passes through a bypass tube 18a. It is important to note that this figure is not necessarily to scale. Typically the sensor passageway 12 is significantly smaller than the primary conduit 18, but is shown somewhat large in FIG. 2 for clarity. Generally one or more heating elements 20 attach to the sensor passageway 12 to allow a heat transfer from the heating elements 20, through the tube 12 and to the fluid. The heating elements 20 also serve as resistance temperature sensors that track the local temperature of the wall of the sensor passageway 12.

[0005] Heat transfer between the fluid flowing in the sensor passageway 12 from the tube walls is a function of the difference between the fluid temperature and the wall temperature, and the heat transfer rate coefficient inside of the tube 12. The increase in gas temperature between the two heating elements 20 is a function of the mass flow rate of the

gas through the sensor passageway 12, the specific heat of the gas, and the power delivered to the heater elements 20. A circuit converts the difference in resistance (or temperature) of the two elements 20 into a voltage output (power) which is calibrated to known flow rates. Normally, the change in resistance is converted to voltage by a Wheatstone bridge, which is connected to the processor. The processor compares the voltage level to stored reference gas calibration data to determine the flow rate. The stored reference gas calibration data, or table, includes voltages produced by the sensor for a range of known flow rates of the reference gas.

[0006] Since the calibration data changes for gases other than the reference gas, a characterization of the calibration data is required for each type of gas being measured in the sensor passageway 12, in order for the resulting measurement to be accurate. This characterization is also referred to as multi-gas correction functions. The multi-gas correction function is the ratio of flows, in the sensor passageway 12 only, of the new gas over the reference gas (Q_{new}/Q_{ref}). This ratio changes with sensor voltage. The calibration table of the reference gas is simply a list of sensor voltages and measured total flows at those voltages. To obtain the calibration table in the new gas, the flow of the reference gas is multiplied by the multi-gas correction function at each voltage in the reference gas calibration table. The multi-gas correction function is meant to make the sensor passageway 12 independent of the type of gas being measured.

[0007] The multi-gas correction function assumes that a bypass ratio is the same in both the reference gas and the gas being measured. The bypass ratio η (also referred to as split ratio) of the sensor 10 is defined as the total flow through the bypass tube 18a and the sensor passageway 12, Q_{total} divided by flow through just the sensor passageway 12, Q_{sensor} .

$$BypassRatio = \eta = \frac{Q_{Total}}{Q_{sensor}} \quad (1)$$

[0008] In a multi-gas application, η must be equal for all gases. Any change in η from that of the reference gas is defined as the multi-gas bypass ratio error ϵ_{bp} for that gas.

$$MultigasBypassRatioError = \epsilon_{bp} = \left(\frac{\eta - \eta_{ref}}{\eta_{ref}} \right) \quad (2)$$

[0009] ϵ_{bp} translates directly into a calibration error for the new gas. The bypass tube 18a is normally designed to minimize this error.

[0010] The multi-gas bypass ratio error ϵ_{bp} occurs because the bypass ratio η changes for different gases because of pressure losses, such as entrance effects, caused by non-ideal geometric conditions of the primary conduit, the bypass tube and the sensor passageway. Entrance effects generally can be defined as the pressure drop associated with the flow entering the duct divided by the total pressure drop across the duct. These pressure losses are often referred to as "Reynolds losses" because the losses are a function of the Reynolds number of the gas being measured. The Reynolds

losses can be a major source of error in measuring the gas flow. The Reynolds losses are normally minimized or eliminated so that the bypass ratio η remains constant for different gases by properly designing the bypass passageway **18a**. Properly designing the bypass passageway **18a**, however, often results in a complex, relatively large and expensive sensor **10**. For example, most bypass tubes are provided with laminar flow elements comprising one or more long, thin channels which make the entrance effects of each channel negligible.

[0011] It is an object of the present disclosure to provide an improved thermal mass flow rate sensor which can be used with different gases. Preferably, the improved thermal mass flow rate sensor will accurately measure any type of gas but will only require calibration in only one reference gas, such that a characterization of the bypass ratio is not required for each type of gas being measured.

SUMMARY OF THE DISCLOSURE

[0012] The present disclosure provides a new and improved mass flow rate sensor for measuring a fluid flow rate. The apparatus includes a main conduit for containing a fluid flow, and a sensor passageway for tapping a portion of the fluid flow from the main conduit at a first location, and returning the portion of the fluid flow to the conduit at a second location. At least one bypass passageway is positioned in the main conduit between the first and second locations, and the bypass passageway is provided with entrance effects that are substantially equal to entrance effects of the sensor passageway. According to one aspect of the present disclosure, the mass flow rate sensor includes a plurality of bypass passageways and each bypass passageway has entrance effects that are substantially equal to the entrance effects of the sensor passageway.

[0013] Among other features and benefits, the mass flow rate sensor of the present disclosure accurately measures any type of gas but only requires calibration in only one reference gas, such that a characterization of a bypass ratio is not required for each type of gas being measured.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] The foregoing and other objects of this disclosure, the various features thereof, as well as the disclosure itself, may be more fully understood from the following description, when read together with the accompanying drawings in which:

[0015] **FIG. 1** shows an exemplary embodiment of a mass flow rate sensor constructed in accordance with the prior art;

[0016] **FIG. 2** shows a sectional view of an exemplary embodiment of a mass flow rate sensor constructed in accordance with the present disclosure and including a main conduit and a sensor passageway for tapping a portion of the fluid flow from the main conduit, and multiple bypass passageways positioned in the main conduit;

[0017] **FIG. 3** shows a perspective view of the bypass passageways of the mass flow rate sensor of **FIG. 2**;

[0018] **FIG. 4** shows an elevation end view of the bypass passageways of the mass flow rate sensor of **FIG. 2**;

[0019] **FIG. 5** is a graph illustrating entrance effects in a sensor passageway; and

[0020] **FIG. 6** is a graph illustrating multiple gas bypass ratio errors for two gases versus bypass passageway inside diameters for bypass passageways of a given length for a mass flow rate sensor constructed in accordance with the present disclosure.

[0021] Elements having the same reference character designations represent like elements throughout the drawings.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

[0022] Referring to the drawings, **FIG. 2** shows a sectional view of an exemplary embodiment of a sensor apparatus **100** for use in a mass flow rate sensor. The sensor apparatus **100** includes a main conduit **102** for containing a fluid flow **104**, and a sensor passageway **106** (also referred to as a capillary tube) for tapping a portion **108** of the fluid flow **104** from the main conduit **102** at a first location, and returning the portion **108** of the fluid flow to the conduit **102** at a second location, around a bypass section **110** of the main conduit **102**. The bypass section **110** includes at least one bypass passageway **112**.

[0023] The bypass passageway **112** is provided with a hydrodynamic development length that is substantially equal to a hydrodynamic development length of the sensor passageway **106** so that the entrance effects are similar for both the sensor passageway **106** and the bypass passageway **110**. Similar entrance effects occur when viscous losses due to flow entering each tube **106**, **110** are equal even if the tubes have different geometries. Among other features and benefits, a mass flow rate sensor **100** of the present disclosure accurately measures any type of gas but only requires calibration in one reference gas, such that a characterization of a bypass ratio is not required for each type of gas being measured. In other words, the new and improved thermal mass flow rate sensor **100** is substantially independent of gas properties.

[0024] The sensor passageway **106** and the bypass passageway **112** in the exemplary embodiment of **FIG. 2** are characterized by a round cross section, i.e., having an inner radius and an outer radius, and the bypass passageway **112** actually comprises a tube. Other cross sections may also be used, as long as the entrance effects of the bypass passageway **112** are the same as or approximate the entrance effects of the sensor passageway **106**. For example, the bypass passageways may have a square cross section, which may be formed between layers of a laminar flow element. The bypass passageways may also be formed within a rolled sheet, wherein the passageways comprise the spaces between each layer of the rolled sheet.

[0025] In the exemplary embodiment of **FIG. 2** the bypass section **110** includes a number of the bypass tubes **112**, disposed parallel to one another and surrounded by a housing tube **114**. **FIGS. 3 and 4** also show the bypass tubes **112** and the housing tube **114**. The housing tube **114** is shown transparent in **FIG. 3** so that the individual bypass tubes **112** may be observed. Referring to **FIG. 3**, the bypass tubes **112** and the housing tube **114** extend between a first end **118** and a second end **120**, and spaces **116** are located between the individual bypass tubes **112**. Each bypass tube **112** is provided with a hydrodynamic development length that is substantially equal to a hydrodynamic development length

of the sensor passageway **106** so that the entrance effects are similar for both the sensor passageway **106** and the bypass tube **110**.

[0026] In other exemplary embodiments, the multiple bypass tubes **112** are not associated with a housing, but are simply pressed together into a bypass plug and disposed within the main conduit **102** between the two ends of the capillary tube **106**. In one embodiment, the housing tube **114** is constructed and arranged so as to compress the bypass tubes **112** against one another. The housing tube **114** preferably compresses the bypass tubes together without substantially deforming the bypass tubes **112**, although in other embodiments, some measure of deformation to the bypass tubes **112** may be permitted, but only if the entrance effects of the bypass tubes remains substantially equivalent to the entrance effects of the sensor passageway.

[0027] In one embodiment, the spaces **116** between the individual bypass tubes **112**, and also between the bypass tubes and the housing tube, are blocked so that the remaining fluid **104** (i.e., the fluid not passing through the capillary tube **106**) only passes through the bypass tubes **112**. In some embodiments, the spaces **116** are blocked only at the first end **118** and the second end **120** of the bypass section **110**, although other embodiments may include blocking material in the spaces **116** along the entire length of the bypass passageways **112**.

[0028] A bypass ratio of the bypass apparatus **100** is given by the ratio of the amount of fluid flowing through the bypass section **110** to the amount of fluid flowing through the sensor passageway **106**. The number of bypass tubes **112** in the bypass section **110** may be chosen to result in a desired bypass ratio. For example, an embodiment with ninety-nine bypass tubes **112** and one sensor passageway **106**, wherein the bypass tubes and the sensor passageway have the same dimensions, would provide a bypass ratio of **100**.

[0029] The bypass ratio is defined as total flow Q_{total} through the sensor passageway and the bypass tube divided by flow Q_{sensor} through just the sensor passageway.

$$BypassRatio \equiv \eta = \frac{Q_{total}}{Q_{sensor}} \quad (3)$$

[0030] In a multi-gas application, η must be equal for all gases. Any change in η from that of the reference gas is defined as the multi-gas bypass ratio error for that gas.

$$MultiGasBypassRatioError \equiv \epsilon_{bp} = \frac{\eta - \eta_{ref}}{\eta_{ref}} \quad (4)$$

[0031] ϵ_{bp} translates directly into a calibration error for the new gas. The bypass tubes must be designed to minimize this error.

[0032] The hydrodynamic characteristics of each of the bypass tubes **112** must match (or closely approximate) those of the sensor passageway **106** for the embodiments described herein. The physical characteristics (e.g., size) of the bypass tubes **112**, however, may be different as compared to the sensor passageway **106**. For exemplary bypass

tubes having a substantially round cross section, the hydrodynamic characteristics will remain substantially equal for a change in the bypass tube inside diameter as long as the bypass tube length correspondingly changes as the inside diameter raised to a power of four. For example, if the bypass tubes have an inside diameter that is one half of the inside diameter of the capillary tube, the length of the bypass tube must be $1/16$ as long as the capillary tube, in order to maintain hydrodynamic equivalence.

[0033] In one embodiment, one or more of the bypass tubes **112** may be replaced with a solid rod, so as to reduce the total number of paths in the bypass section **110**, thereby modifying the bypass ratio. In some embodiments, the bypass tubes **112** are uniformly distributed, or distributed in a regular pattern, over the cross sectional area of the main conduit **102**.

[0034] For simple geometries, the Navier-Stokes equation for incompressible laminar flow in a duct can be solved in closed form creating an elementary model of the bypass element. For the bypass tubes **112** and the sensor passageway **106** the solution for flow in a pipe Q_{pipe} equals,

$$Q_{pipe} = \frac{\pi}{8\mu} * \left(\frac{-dp}{dx} \right) r_o^4 \quad (5)$$

[0035] Where μ is the viscosity of the gas, and r_o is the radius of the pipe. If the cross section is constant, the pressure term is linear.

$$\left(\frac{dp}{dx} \right) = \frac{\Delta p}{L} \quad (6)$$

[0036] Where L is the length of the pipe and Δp is the change of pressure of the gas over the length L .

[0037] An expression for the bypass ratio is obtained by combining the equations above. Constants like π and μ drop out and Δp drops out because the pressure drop across the bypass is the same as the pressure drop across the sensor passageway. The resulting equation shows that the bypass ratio is proportional to the radial dimension to the 4th power but it is only linearly proportional to the length. For the bundled tube bypass, the variable N is introduced as the number of tubes in the bypass.

$$\eta_{tubes} = \frac{N_{tubes} L_s r_{tubes}^4}{L_{bp} r_s^4} \quad (7)$$

[0038] Where L_{bp} is the Length of the bypass tube, L_s is the Length of the sensor passageway, r_s is the radius of the sensor passageway, N is the number of bypass tubes, and r_{tubes} is the combined radii of the bypass tubes. As shown, the bypass ratio is only a function of geometry and is therefore the same in all gases. This is true as long as the assumptions that go into the elementary model are valid.

[0039] The only significant assumption in the elementary model is that the flow is fully developed. The term "fully

developed” means that a cross sectional velocity distribution of the flow in the pipe is the same at every point in the length of the pipe. This assumption does not hold in the entrance to the pipe, where the hydrodynamic development length or entrance length, is the distance the flow must travel down the tube before flow becomes fully developed.

[0040] In the hydrodynamic development length, a viscous fluid enters a duct, the uniform velocity distribution of the flow is gradually redistributed into a parabolic velocity profile due to the retarding influence of the shear stresses along the side walls. At an end of the hydrodynamic development length, the velocity profile no longer changes in the axial direction, and under such conditions the flow is said to be fully-developed.

[0041] Dimensional analysis and empirical studies have shown that the hydrodynamic development length is a function of the Reynolds number, Re, and the hydraulic diameter, Dh, of the duct.

$$\text{EntranceLength} = L_e \approx 0.06 \text{ Re Dh} \quad (8)$$

[0042] The entrance length has an associated pressure drop that is known as the entrance effect. An exact solution for the entrance effect is not known, however a dimensionless ratio of the entrance length to the duct length can be used as a first order approximation of the entrance effect.

$$L_{\text{eff}} = L_e / L \quad (9)$$

[0043] L_{eff} is an approximation of the error in the dp/dx term or the error in the assumption of equation 4. Since the entrance length L_e is a function of Re, the entrance length L_e is in turn a function of both gas and flow and thus it becomes a source for multi-gas bypass ratio error (ϵ_{bp}). The best way to eliminate this source of error is to design the sensor passageway 106 and the bypass tubes 112 such that the entrance effect is small. If it is not possible to design the sensor passageway 106 and the bypass tubes 112 such that the entrance effect is small, each of the bypass tubes 112 and the sensor passageway 106 are designed such that the entrance effect is the same in both.

[0044] A bundled tube bypass is a laminar flow element that is comprised of a matrix of many of the small bypass tubes 112 packed into a housing tube 114 as shown in FIGS. 2 through 4. The advantage of the bundled bypass tubes over a single bypass tube is that the bundled bypass tubes utilize much more of the available cross sectional area of the conduit 102 (as shown in FIG. 2) while still behaving like a small tube, i.e., similar to the sensor passageway 106. The bundled bypass tubes allow bypasses for much higher flow rates to be designed while keeping the bypass ratio constant in all gases.

[0045] According to one exemplary embodiment, the bundled bypass tubes 112 are a matrix of tubes 112 that are geometrically identical (i.e., same length and inside diameter) to the sensor passageway 106 and packed in tight triangular fashion as shown in FIG. 4. The packing density of the matrix of tubes 112 is uniform, since any inconsistencies in the packing density will create flow passages with different diameters and different entrance effects. Since the flow is proportional to the 4th power of the diameter, it is only the imperfections that create larger gaps in the matrix that cause a problem and the smaller passages can be neglected. For example, if the tubes 112 are packed together as shown in FIG. 4, the hydraulic diameter of the spaces 116

between the tubes is about 1/10th of the outside diameter of the bypass tubes and the flow through the spaces 116 is 1/100th of 1% of the total flow. The performance of the bundled bypass tubes 112 is a summation of all the flow passages. Therefore, the more tubes 112 in the bundled bypass tubes, the more the imperfections will average out. Bypasses with many tubes 112 are more consistent in η and in ϵ_{bp} .

[0046] The number of bypass tubes 112 in the housing 114 can be approximated from the inside diameter of the bypass housing 114 and the outside diameter of each of the bypass tubes. The number of tubes 112 can further be adjusted by replacing some of the tubes 112 with solid filled rods.

$$N_{\text{tubes}} \approx 0.907 \left(\frac{ID_{\text{house}}}{OD_{\text{tubes}}} - 1 \right)^2 - N_{\text{rods}} \quad (10)$$

[0047] Unfortunately, it is rarely possible to use the same tube size in the bypass as in the sensor so a bypass tube 112 is designed where the entrance effect is similar to that in the sensor passageway. By setting L_{eff} of the sensor passageway 106 equal to L_{eff} of the bypass tube 112, an expression for the bypass tube 112 radius that satisfies this condition can be derived.

$$r_{\text{tubes}} = \sqrt[3]{\frac{L_{\text{bp}}}{L_s}} r_s \quad (11)$$

[0048] Equation 9 is only a first order approximation. Since there is no closed form solution for the entrance effect, a numerical simulation is required to determine the geometry that achieves this condition.

[0049] Based on the elementary model and the assumptions that go into it, design guidelines for the bundled bypass tubes in multi-gas applications include: an entrance effect for the bypass tube 112 and the sensor passageway 106 should be equivalent and as small as possible; a packing density of the bundled bypass tubes 112 must be as uniform as possible, and preferably a triangular pattern such as shown in FIG. 4; the packing density pattern of the bundled bypass tubes 112 should not have gaps or holes that are larger than an inside diameter of the bypass tubes 112 since such gaps or holes will result in a multi-gas error; the bypass ratio will be proportional to the 4th power of the diameter of the bypass tubes 112; the bypass ratio will be directly proportional to the number of bypass tubes 112; the bypass ratio will be directly proportional to the length of each of the bypass tubes 112; and the more bypass tubes 112 in the bundle, the more repeatable the bundled bypass tubes will be.

[0050] Since there is no exact solution for the entrance effect, a numerical model of flow in a passageway was developed to explore this effect. The sensor flow and the bypass flow are modeled independently. Axi-symmetry is employed and the flow is considered to be incompressible. The boundary conditions for these models are ΔP , or more specifically, the inlet pressure with the exit pressure set to zero. The flow is obtained by integrating the normal velocity across the exit and the bypass ratio is obtained by dividing

the bypass flow by the sensor flow at the same pressure. The length, inside diameter and ΔP are parametrically defined. As the pressure goes up, the flow through the passageway increases.

[0051] FIG. 5 shows a typical velocity field at the entrance of the sensor passageway. When the flow is fully developed, the velocity contours should all be parallel to the edge of the passageway. A bundled tube bypass with ideal packing can be simulated with the sensor passageway model by changing the ID and L of the passageway and dividing the flow by the sensor passageway flow at the same pressure. This would represent η of one bundled tube ($N_{\text{Tubes}}=1$), but it could also represent η of any number of tubes simply by multiplying it by N_{Tubes} . ϵ_{bp} would also be the same in one tube as it would be in many tubes. By running the model in other gases, ϵ_{bp} can be obtained.

[0052] FIG. 6 shows ϵ_{bp} as a function of the inside diameter of the bundling tube for the mass flow controller at %120 full range for both SF_6 and He. FIG. 6 shows that for a bypass tube that is 1.125" long in the mass flow controller, the inside diameter should be between 8 and 10 mils to have ϵ_{bp} be negligible. The fact that both SF_6 and He, which have very different Reynolds numbers, have zero error at exactly the same diameter proves that there is an equivalent length and diameter combination where the entrance effect is the same as in the sensor passageway. Equation 9 predicts a diameter of 9.7 mils which is high by %8. This error comes from the approximations in equation 6 and that L_{eff} is equal to the error in equation 4.

[0053] Although not shown, a mass flow rate sensor including the sensor apparatus 100 of the present invention can be incorporated in a mass flow controller, for example. A mass flow controller generally includes the mass flow rate sensor for measuring the rate of flow of gas through the controller, a valve for controlling the flow of gas through the controller and a computer connected to the mass flow rate sensor and the valve. The computer is programmed with a desired flow rate, which the computer compares to an actual flow rate as measured by the mass flow rate sensor. If the actual flow rate does not equal the desired flow rate, the computer is further programmed to open or close the valve until the actual flow rate equals the desired flow rate.

[0054] The present disclosure may be embodied in other specific forms without departing from the spirit or essential characteristics thereof. The exemplary embodiments describe herein are therefore to be considered in respects as illustrative and not restrictive, the scope of the disclosure being indicated by the appended claims rather than by the foregoing description. All changes which come within the meaning and range of the equivalency of the claims are therefore intended to be embraced therein.

[0055] What is claimed is:

1. A sensing apparatus for use in a mass flow rate sensor for measuring a fluid flow rate, comprising:

a main conduit for containing a fluid flow;

a sensor passageway tapping a portion of the fluid flow from the main conduit at a first location, and returning the portion of the fluid flow to the conduit at a second location; and

at least one bypass passageway positioned in the main conduit between the first location and the second location, wherein the bypass passageway has non-negligible entrance effects substantially equal to entrance effects of the sensor passageway.

2. A sensing apparatus according to claim 1, wherein a plurality of the bypass passageways are positioned in the main conduit between the first location and the second location, and each of the bypass passageways has entrance effects substantially equal to entrance effects of the sensor passageway.

3. A sensing apparatus according to claim 2, wherein the bypass passageways are disposed within a larger tube, and the larger tube compresses the two or more bypass passageways against one another.

4. A sensing apparatus according to claim 3, wherein the compressed bypass passageways are not substantially deformed.

5. A sensing apparatus according to claim 2, wherein a total number of the bypass passageways is selected to produce a desired bypass ratio.

6. A sensing apparatus according to claim 2, wherein one or more of the bypass passageways is replaced by an equal size rod, so as to decrease the fluid flow through the main conduit between the first location and the second location.

7. A sensing apparatus according to claim 2, wherein the fluid flow in the main conduit from the first location to the second location occurs only through the bypass passageways.

8. A sensing apparatus according to claim 7, wherein one or more spaces between the bypass passageways are blocked, so that fluid flow in the main conduit from the first location to the second location occurs only through the bypass passageways.

9. A sensing apparatus according to claim 1, wherein an entrance effect for the bypass passageway and the sensor passageway are relatively small.

10. A sensing apparatus according to claim 2, wherein the bypass passageways are bundled so that a packing density of the bundled bypass passageways is substantially uniform.

11. A sensing apparatus according to claim 2, wherein the bypass passageways are bundled in a triangular pattern.

12. A sensing apparatus according to claim 2, wherein each of the bypass passageways comprises a tube having a length and an inside diameter substantially equal to a length and inside diameter of the sensor passageway.

13. A method of measuring a fluid flow rate that provides a substantially linear output at higher flow rates, comprising:

providing a main conduit for containing a fluid flow;

providing a sensor passageway for tapping a portion of the fluid flow from the main conduit at a first location, and returning the portion of the fluid flow to the conduit at a second location;

providing at least one bypass passageway in the main conduit between the first location and the second location; and

providing the bypass passageway with non-negligible entrance effects substantially equal to entrance effects of the sensor passageway.

14. A method according to claim 13, wherein a plurality of the bypass passageways are positioned in the main conduit between the first location and the second location,

and each of the bypass passageways is provided with entrance effects substantially equal to entrance effects of the sensor passageway.

15. A method according to claim 14, wherein the bypass passageways are disposed within a larger tube, and the larger tube compresses the two or more bypass passageways against one another.

16. A method according to claim 14, wherein the compressed bypass passageways are not substantially deformed.

17. A method according to claim 14, wherein a total number of the bypass passageways is provided to produce a desired bypass ratio.

18. A method according to claim 14, wherein one or more of the bypass passageways is replaced by an equal size rod.

19. A method according to claim 14, wherein one or more spaces between the bypass passageways are blocked.

20. A method according to claim 14, wherein an entrance effect for the bypass passageways and the sensor passageway are relatively small.

21. A method according to claim 14, wherein the bypass passageways are bundle so that a packing density of the bundled bypass passageways is substantially uniform.

22. A method according to claim 14, wherein the bypass passageways are bundled in a triangular pattern.

22. A method according to claim 14, wherein each of the bypass passageways comprises a tube provided with a length and an inside diameter substantially equal to a length and inside diameter of the sensor passageway.

23. A sensing apparatus for use in a mass flow rate sensor for measuring a fluid flow rate, comprising:

a main conduit for containing a fluid flow;

a sensor passageway tapping a portion of the fluid flow from the main conduit at a first location, and returning the portion of the fluid flow to the conduit at a second location; and

bypass passageways positioned in the main conduit between the first location and the second location, wherein each of the bypass passageways comprises a tube having a length and an inside diameter substantially equal to a length and inside diameter of the sensor passageway.

24. A sensing apparatus according to claim 23, wherein the bypass tubes are disposed within a larger tube, and the larger tube compresses the bypass passageways together.

25. A sensing apparatus according to claim 23, wherein a total number of the bypass tubes is selected to produce a desired bypass ratio.

26. A sensing apparatus according to claim 23, wherein one or more of the bypass tubes is replaced by an equal size rod.

27. A sensing apparatus according to claim 23, wherein one or more spaces between the bypass tubes are blocked.

28. A sensing apparatus according to claim 23, wherein the bypass tubes are bundled in a triangular pattern having a substantially uniform packing density.

29. A mass flow controller including a mass flow sensing apparatus according to claim 1, and further including:

a valve for controlling mass flow through the main conduit of the mass flow sensing apparatus; and

a processor connected to the mass flow sensing apparatus and the valve and programmed to receive a desired flow rate, compare the desired flow rate to an actual flow rate as measured using the mass flow sensing apparatus, and, if the actual flow rate does not equal the desired flow rate, operate the valve until the actual flow rate equals the desired flow rate.

30. A mass flow controller including a mass flow sensing apparatus according to claim 23, and further including:

a valve for controlling mass flow through the main conduit of the mass flow sensing apparatus; and

a processor connected to the mass flow sensing apparatus and the valve and programmed to receive a desired flow rate, compare the desired flow rate to an actual flow rate as measured using the mass flow sensing apparatus, and, if the actual flow rate does not equal the desired flow rate, operate the valve until the actual flow rate equals the desired flow rate.

* * * * *